

Day-Brite



by Signify

IES INDOOR REPORT PHOTOMETRIC FILENAME : RBX15L835-A22R.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] FO35674.PSO
[TESTLAB] DAY-BRITE PHOTOMETRIC LABORATORY
[ISSUE DATE] 12/28/15
[MANUFAC] SIGNIFY DAY-BRITE - CFI
[LUMCAT] RBX15L835-UNV-WT-A22R
[LUMINAIRE] RBX 22"
[MORE] ALUMINUM OPEN HIGHBAY 4-DLS3 2015 3500K BOARDS 2-95W DRIVERS 1.37K RESISTORS
[LAMP] LED. LUMINAIRE OUTPUT = 14132 LUMENS
[TESTDATE] 12/28/15
[_LM79] Absolute Photometry tested in accordance with IES procedure LM79-08

CHARACTERISTICS

Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	14132
Total Luminaire Efficiency	N.A.
Luminaire Efficacy Rating (LER)	108
Total Luminaire Watts	131.4
Ballast Factor	1.00
CIE Type	Direct
Spacing Criterion (0-180)	1.02
Spacing Criterion (90-270)	1.02
Spacing Criterion (Diagonal)	1.02
Basic Luminous Shape	Circular w/ Sides
Luminous Length (0-180)	1.83 ft (Diameter)
Luminous Width (90-270)	1.83 ft (Diameter)
Luminous Height	1.17 ft



LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	6513	6513	6513
55	1779	1779	1779
65	900	900	900
75	388	388	388
85	63	63	63

IES INDOOR REPORT
PHOTOMETRIC FILENAME : RBX15L835-A22R.IES

CANDELA TABULATION

	<u>0.0</u>	<u>22.5</u>	<u>45.0</u>	<u>67.5</u>	<u>90.0</u>	<u>112.5</u>	<u>135.0</u>	<u>157.5</u>	<u>180.0</u>	<u>202.5</u>
0.0	11711.4	11711.4	11711.4	11711.4	11711.4	11711.4	11711.4	11711.4	11711.4	11711.4
2.5	11689.8	11689.8	11689.8	11689.8	11689.8	11689.8	11689.8	11689.8	11689.8	11689.8
5.0	11635.4	11635.4	11635.4	11635.4	11635.4	11635.4	11635.4	11635.4	11635.4	11635.4
7.5	11542.3	11542.3	11542.3	11542.3	11542.3	11542.3	11542.3	11542.3	11542.3	11542.3
10.0	11382.5	11382.5	11382.5	11382.5	11382.5	11382.5	11382.5	11382.5	11382.5	11382.5
12.5	11134.7	11134.7	11134.7	11134.7	11134.7	11134.7	11134.7	11134.7	11134.7	11134.7
15.0	10792.6	10792.6	10792.6	10792.6	10792.6	10792.6	10792.6	10792.6	10792.6	10792.6
17.5	10346.0	10346.0	10346.0	10346.0	10346.0	10346.0	10346.0	10346.0	10346.0	10346.0
20.0	9812.5	9812.5	9812.5	9812.5	9812.5	9812.5	9812.5	9812.5	9812.5	9812.5
22.5	9228.8	9228.8	9228.8	9228.8	9228.8	9228.8	9228.8	9228.8	9228.8	9228.8
25.0	8649.1	8649.1	8649.1	8649.1	8649.1	8649.1	8649.1	8649.1	8649.1	8649.1
27.5	8102.0	8102.0	8102.0	8102.0	8102.0	8102.0	8102.0	8102.0	8102.0	8102.0
30.0	7509.4	7509.4	7509.4	7509.4	7509.4	7509.4	7509.4	7509.4	7509.4	7509.4
32.5	6715.3	6715.3	6715.3	6715.3	6715.3	6715.3	6715.3	6715.3	6715.3	6715.3
35.0	5744.7	5744.7	5744.7	5744.7	5744.7	5744.7	5744.7	5744.7	5744.7	5744.7
37.5	4720.3	4720.3	4720.3	4720.3	4720.3	4720.3	4720.3	4720.3	4720.3	4720.3
40.0	3760.7	3760.7	3760.7	3760.7	3760.7	3760.7	3760.7	3760.7	3760.7	3760.7
42.5	2857.7	2857.7	2857.7	2857.7	2857.7	2857.7	2857.7	2857.7	2857.7	2857.7
45.0	2043.5	2043.5	2043.5	2043.5	2043.5	2043.5	2043.5	2043.5	2043.5	2043.5
47.5	1306.3	1306.3	1306.3	1306.3	1306.3	1306.3	1306.3	1306.3	1306.3	1306.3
50.0	833.5	833.5	833.5	833.5	833.5	833.5	833.5	833.5	833.5	833.5
52.5	645.3	645.3	645.3	645.3	645.3	645.3	645.3	645.3	645.3	645.3
55.0	539.6	539.6	539.6	539.6	539.6	539.6	539.6	539.6	539.6	539.6
57.5	451.7	451.7	451.7	451.7	451.7	451.7	451.7	451.7	451.7	451.7
60.0	376.1	376.1	376.1	376.1	376.1	376.1	376.1	376.1	376.1	376.1
62.5	311.3	311.3	311.3	311.3	311.3	311.3	311.3	311.3	311.3	311.3
65.0	255.5	255.5	255.5	255.5	255.5	255.5	255.5	255.5	255.5	255.5
67.5	207.3	207.3	207.3	207.3	207.3	207.3	207.3	207.3	207.3	207.3
70.0	165.7	165.7	165.7	165.7	165.7	165.7	165.7	165.7	165.7	165.7
72.5	130.1	130.1	130.1	130.1	130.1	130.1	130.1	130.1	130.1	130.1
75.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2	99.2
77.5	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7	72.7
80.0	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9	49.9
82.5	30.3	30.3	30.3	30.3	30.3	30.3	30.3	30.3	30.3	30.3
85.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8	13.8
87.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
112.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

IES INDOOR REPORT
PHOTOMETRIC FILENAME : RBX15L835-A22R.IES

CANDELA TABULATION - (Cont.)

135.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
160.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7
162.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
165.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
167.5	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1
170.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
172.5	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
175.0	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
177.5	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
180.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5	3.5

Vert. Angles **Horizontal Angles**

	<u>225.0</u>	<u>247.5</u>	<u>270.0</u>	<u>292.5</u>	<u>315.0</u>	<u>337.5</u>	<u>360.0</u>
0.0	11711.4	11711.4	11711.4	11711.4	11711.4	11711.4	11711.4
2.5	11689.8	11689.8	11689.8	11689.8	11689.8	11689.8	11689.8
5.0	11635.4	11635.4	11635.4	11635.4	11635.4	11635.4	11635.4
7.5	11542.3	11542.3	11542.3	11542.3	11542.3	11542.3	11542.3
10.0	11382.5	11382.5	11382.5	11382.5	11382.5	11382.5	11382.5
12.5	11134.7	11134.7	11134.7	11134.7	11134.7	11134.7	11134.7
15.0	10792.6	10792.6	10792.6	10792.6	10792.6	10792.6	10792.6
17.5	10346.0	10346.0	10346.0	10346.0	10346.0	10346.0	10346.0
20.0	9812.5	9812.5	9812.5	9812.5	9812.5	9812.5	9812.5
22.5	9228.8	9228.8	9228.8	9228.8	9228.8	9228.8	9228.8
25.0	8649.1	8649.1	8649.1	8649.1	8649.1	8649.1	8649.1
27.5	8102.0	8102.0	8102.0	8102.0	8102.0	8102.0	8102.0
30.0	7509.4	7509.4	7509.4	7509.4	7509.4	7509.4	7509.4
32.5	6715.3	6715.3	6715.3	6715.3	6715.3	6715.3	6715.3
35.0	5744.7	5744.7	5744.7	5744.7	5744.7	5744.7	5744.7
37.5	4720.3	4720.3	4720.3	4720.3	4720.3	4720.3	4720.3
40.0	3760.7	3760.7	3760.7	3760.7	3760.7	3760.7	3760.7
42.5	2857.7	2857.7	2857.7	2857.7	2857.7	2857.7	2857.7
45.0	2043.5	2043.5	2043.5	2043.5	2043.5	2043.5	2043.5
47.5	1306.3	1306.3	1306.3	1306.3	1306.3	1306.3	1306.3
50.0	833.5	833.5	833.5	833.5	833.5	833.5	833.5
52.5	645.3	645.3	645.3	645.3	645.3	645.3	645.3
55.0	539.6	539.6	539.6	539.6	539.6	539.6	539.6
57.5	451.7	451.7	451.7	451.7	451.7	451.7	451.7
60.0	376.1	376.1	376.1	376.1	376.1	376.1	376.1
62.5	311.3	311.3	311.3	311.3	311.3	311.3	311.3
65.0	255.5	255.5	255.5	255.5	255.5	255.5	255.5
67.5	207.3	207.3	207.3	207.3	207.3	207.3	207.3
70.0	165.7	165.7	165.7	165.7	165.7	165.7	165.7
72.5	130.1	130.1	130.1	130.1	130.1	130.1	130.1
75.0	99.2	99.2	99.2	99.2	99.2	99.2	99.2
77.5	72.7	72.7	72.7	72.7	72.7	72.7	72.7
80.0	49.9	49.9	49.9	49.9	49.9	49.9	49.9

**IES INDOOR REPORT
 PHOTOMETRIC FILENAME : RBX15L835-A22R.IES**

CANDELA TABULATION - (Cont.)

82.5	30.3	30.3	30.3	30.3	30.3	30.3	30.3
85.0	13.8	13.8	13.8	13.8	13.8	13.8	13.8
87.5	0.7	0.7	0.7	0.7	0.7	0.7	0.7
90.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
92.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
95.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
97.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
100.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
102.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
105.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
107.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
110.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
112.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
115.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
117.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
120.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
122.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
125.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
127.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
130.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
132.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
135.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
137.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
140.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
142.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
145.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
147.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
150.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
152.5	0.0	0.0	0.0	0.0	0.0	0.0	0.0
155.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
157.5	0.2	0.2	0.2	0.2	0.2	0.2	0.2
160.0	0.7	0.7	0.7	0.7	0.7	0.7	0.7
162.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2
165.0	1.7	1.7	1.7	1.7	1.7	1.7	1.7
167.5	2.1	2.1	2.1	2.1	2.1	2.1	2.1
170.0	2.4	2.4	2.4	2.4	2.4	2.4	2.4
172.5	2.8	2.8	2.8	2.8	2.8	2.8	2.8
175.0	3.3	3.3	3.3	3.3	3.3	3.3	3.3
177.5	3.4	3.4	3.4	3.4	3.4	3.4	3.4
180.0	3.5	3.5	3.5	3.5	3.5	3.5	3.5

IES INDOOR REPORT
PHOTOMETRIC FILENAME : RBX15L835-A22R.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	4118.36	N.A.	29.10
0-30	8095.94	N.A.	57.30
0-40	11632.04	N.A.	82.30
0-60	13745.94	N.A.	97.30
0-80	14111.88	N.A.	99.90
0-90	14130.83	N.A.	100.00
10-90	13027.89	N.A.	92.20
20-40	7513.68	N.A.	53.20
20-50	9128.55	N.A.	64.60
40-70	2371.9	N.A.	16.80
60-80	365.93	N.A.	2.60
70-80	107.93	N.A.	0.80
80-90	18.95	N.A.	0.10
90-110	0.00	N.A.	0.00
90-120	0.00	N.A.	0.00
90-130	0.00	N.A.	0.00
90-150	0.00	N.A.	0.00
90-180	0.77	N.A.	0.00
110-180	0.77	N.A.	0.00
0-180	14131.6	N.A.	100.00

Total Luminaire Efficiency = N.A. %

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	1102.94
10-20	3015.42
20-30	3977.58
30-40	3536.1
40-50	1614.87
50-60	499.03
60-70	258.00
70-80	107.93
80-90	18.95
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.06
160-170	0.44
170-180	0.28


IES INDOOR REPORT
PHOTOMETRIC FILENAME : RBX15L835-A22R.IES

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0	
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
1	113	110	107	104	110	107	105	103	103	101	99	100	98	96	96	95	94	92	
2	106	101	96	92	104	99	95	91	96	92	89	93	90	87	90	87	85	84	
3	100	93	87	83	98	91	86	82	89	84	81	86	82	79	84	81	78	76	
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	74	71	70	
5	89	79	73	68	87	78	72	67	76	71	67	75	70	66	73	69	66	64	
6	83	73	67	62	82	73	66	62	71	65	61	70	65	61	68	64	60	59	
7	79	68	62	57	77	68	61	57	66	61	56	65	60	56	64	59	56	54	
8	74	64	57	53	73	63	57	53	62	56	52	61	56	52	60	55	52	50	
9	70	60	53	49	69	59	53	49	58	53	49	57	52	48	56	52	48	47	
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	43	

POLAR GRAPH

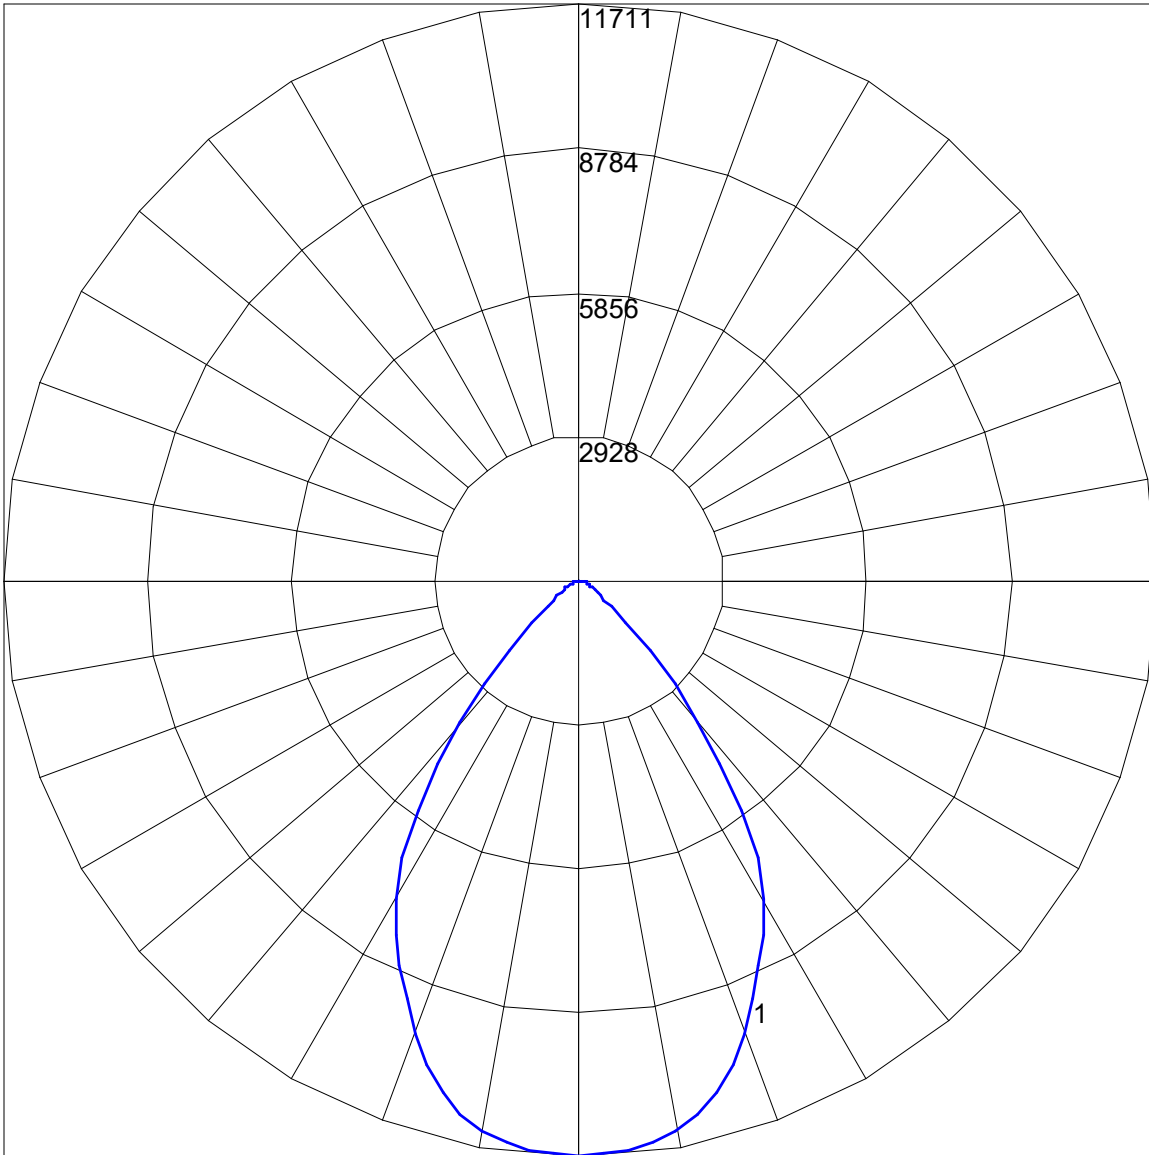

Maximum Candela = 11711.4 Located At Horizontal Angle = 0, Vertical Angle = 0
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)